


YAMAHA SRX 120 & ARCTIC CAT 120 (2010 TO CURRENT) HIGH RPM GOVERNOR SPRING INSTRUCTIONS

REVISED 7/6/14

1. WITH ENGINE SHUT OFF REMOVE STOCK GOVERNOR SPRING. (USING A NEEDLE NOSE PLIERS WILL MAKE SPRING REMOVAL EASIER)
2. INSTALL NEW SPRING IN THE STOCK HOLE LOCATION AS SHOWN IN PICTURE.
3. **VERY IMPORTANT:** WHEN STARTING ENGINE AFTER INSTALLING THE NEW GOVERNOR SPRING, MAKE SURE TO SAFELY RAISE AND SUPPORT BACK OF SLED. START THE SLED TO MAKE SURE GOVERNOR SPRING IS NOT ALLOWING ENGINE TO RUN ABOVE NORMAL IDLE. IF ENGINE IS NOT GOING BACK TO IDLE BEND THE SMALL TAB MARKED WITH THE WHITE ARROW ON PICTURE WITH SMALL PLIERS AWAY FROM THE THROTTLE ARM.
4. THIS SPRING IN THE STOCK LOCATION WILL INCREASE TOP RPMs TO AROUND 6000 + RPMs.

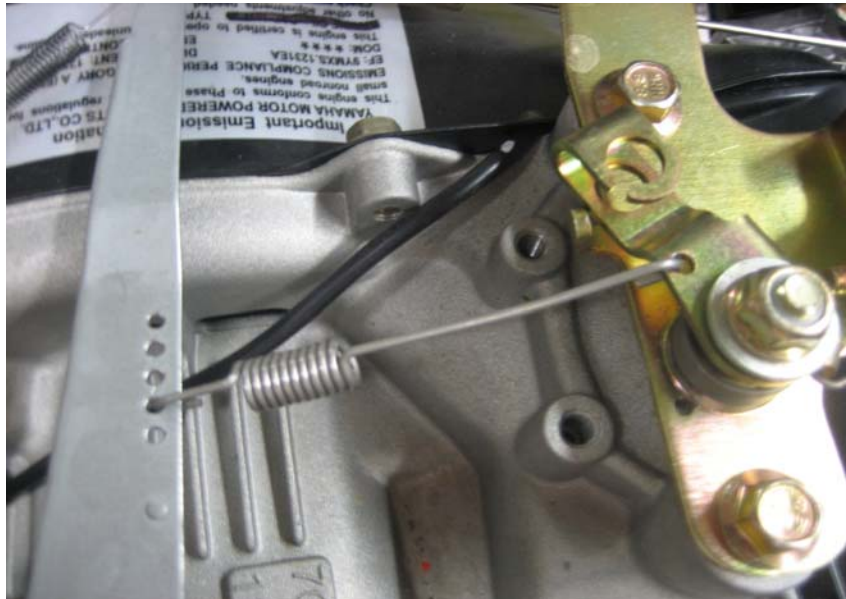

*****PLEASE NOTE*****

This product is intended for closed-course racing only and is sold “as-is” without warranty. Manufacturer and distributor specifically disclaim all responsibility for consequential and incidental damages or any other losses arising from the use of this product. Any dispute arising out of the use of this product must be settled in Linn County, Iowa under Iowa law.
